

# ET 1780 POWER-MAX 3000

**POWER-MAX 3000** is a multi-functional additive system with outstanding detergent cleaning power three times more effective than detergents used in the former L10 testing procedure. **POWER-MAX 3000** is a next generation anti-foulant that vastly improves the performance of ULSD in newer model vehicles equipped with HPFI (High-Pressure Fuel Injection) systems.

**POWER-MAX 3000** will re-establish the thermal and oxidation stability of ULSD and will prevent the formation of black sludge that plugs fuel filters. **POWER-MAX 3000** will clean up hard carbon deposits in fuel injectors and vastly extend filter life. A Clean-Up ratio (see below) will remove deposits and help restore engine power to new engine performance levels.

**POWER-MAX 3000** is formulated with new age lubricity additives and Cetane improvers that increase the Cetane of the fuel up to 2 or 3 points. **POWER-MAX 3000** is formulated to be used in BIO-DIESEL BLENDS as well.

Proper treatment with **POWER-MAX 3000** will vastly extend filter life, restore injector cleanliness, restore lost power, and increase fuel economy.

## *Formulated for Ultra Low Sulfur Diesel Fuels & Bio-Diesel Fuels*

### USER BENEFITS

- Prevents filter plugging caused by thermal stressing of the fuel
- Prevents formation of black sludge/asphaltene
- Restores thermal and oxidation stability of ULSD fuels
- Eliminates formation of carbon deposits in High-Pressure Fuel Injection systems
- Restores horsepower lost due to the formation of deposits
- Vastly extends filter life
- Contains LYVAN which replaces lubricity lost due to the removal of sulfur in the production of **Ultra Low Sulfur Diesel Fuels**
- Cleans fuel injection system and restores fuel economy to new engine performance levels
- **Clean-Up** of fuel injection system per **XUD9** specification, **Keep Clean** per **DW10** and **IDID** specification
- Compatible with bio-diesel fuel and blends.
- Elimination of steel corrosion caused by ULSD
- Restores fuel economy to new engine performance levels
- Contains Anti-Icer and Moisture Control to eliminate water problems

**THIS PRODUCT DOES NOT CONTAIN ALCOHOL**


### TREATMENT RATIOS

<b>1-3000</b>	<p style="text-align: center;"><b>KEEP-CLEAN</b></p> <p>To keep clean and prevent build-up of carbon or soot and vastly extend filter life of equipment that is clean or new</p> <p style="text-align: center;"><i>Increases Cetane up to 2 points.</i></p>
<b>1-1875</b>	<p style="text-align: center;"><b>CLEAN-UP</b></p> <p>Meets or exceeds XUD-9, DW-10, and IDID clean-up specifications</p> <p style="text-align: center;"><i>Increases Cetane up to 3 points</i></p>

*Meets NCWM definition of PREMIUM DIESEL at above ratios*

### CONTAINER SIZES

- ⇒275 Gallon Totes
- ⇒55 Gallon Drums
- ⇒2 - 2.5 Gallon Jugs

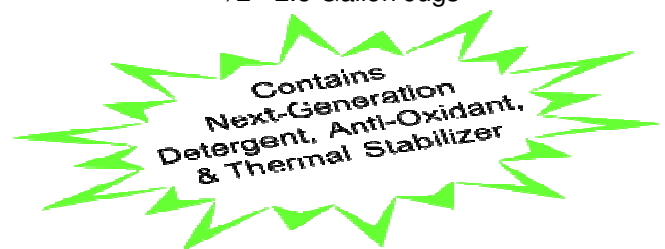

*For use in Tier 1-4 engines and equipment*

**MEETS AND EXCEEDS JOHN DEERE & STANADYNE  
REQUIREMENTS FOR ADDED LUBRICITY  
IN ULTRA LOW SULFUR DIESEL FUELS**