



747 Douglas Road ▪ PO Box 100
 Bremen, IN 46506
 Phone: 800-325-5746 ▪ Fax: 574-546-5379

ET 1930

WINTERIZED POWER-MAX WITH CETANE

HIGH PRESSURE FUEL INJECTOR ANTI-FOULANT

WINTERIZED POWER-MAX W/CETANE is a multi-functional additive system formulated to improve low temperature filterability, control moisture, and prevent filter icing. It contains outstanding detergent cleaning power for heavy duty engines. **WINTERIZED POWER-MAX W/CETANE** is a next generation anti-foulant that completely improves the performance of ULSD in all diesel vehicles equipped with HPFI (High Pressure Fuel Injection) systems.

WINTERIZED POWER-MAX W/CETANE will cleanup hard carbon deposits in fuel injectors and vastly extend filter life. A clean up ratio (see below) will remove deposits and help restore engine power to new engine performance levels. **WINTERIZED POWER-MAX W/CETANE** will reestablish the thermal and oxidation stability of ULSD and will prevent the formation of black sludge that plugs fuel filters.

WINTERIZED POWER-MAX W/CETANE is formulated with next gen lubricity additives and Cetane improvers that will raise the Cetane number of ULSD fuel.

Formulated for Ultra Low Sulfur Diesel Fuels & Bio-Diesel Fuels

USER BENEFITS

- Anti-gel agent lowers filterability of the fuel 12-24° F below the cloud point of the fuel
- Proprietary blend of Cold Flow Improvers and Heavy Wax Modifiers engineered to maximize cold weather operability
- Anti-icer controls moisture and keeps fuel from freezing
- **Cleans-Up** fuel injection systems per **XUD9, Keeps Clean per DW10, DW10C 10/10 and Heavy Duty IDID** as tested on a **John Deere 6.8L Engine**.
- Eliminates formation of carboxylate salt and carbon deposits in High-Pressure Fuel Injection systems.
- Restores fuel economy to new engine performance levels.
- Restores 100% of the rated horsepower lost due to the formation of deposits
- Restores thermal and oxidation stability of ULSD fuels
 - Fewer filter and injector replacements
 - Less down time and maintenance costs
 - Eliminates black sludge formation and fuel degradation
- Contains a premium synthetic lubricity agent which reduces friction and wear in the fuel system.
- Contains moisture control that helps keep tanks and fuel systems dry and corrosion free
- Compatible with bio-diesel fuel blends


TREATMENT RATIOS

1-1500	<p>KEEP-CLEAN</p> <p><i>To keep clean and prevent build-up of carbon or soot and vastly extend filter life of equipment that is clean or new.</i></p> <p><i>Increases Cetane up to 2 points</i></p>
1-937	<p>CLEAN-UP</p> <p><i>Meets or exceeds IDID DW-10C 10/10, DW10B, and XUD9 clean-up specifications</i></p> <p><i>Increases Cetane up to 3 points</i></p>

CONTAINER SIZES

- ⇒275 Gallon Totes
- ⇒55 Gallon Drums
- ⇒2 - 2.5 Gallon Jugs

MEETS AND EXCEEDS JOHN DEERE & STANADYNE REQUIREMENTS FOR ADDED LUBRICITY IN ULTRA LOW SULFUR DIESEL FUELS

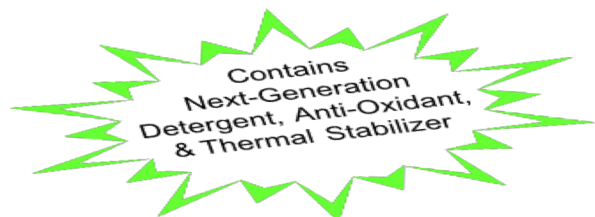

“When Quality and Performance Count...Count on E.T.”

www.etproducts.com ▪ sales@etproducts.com

Created: 11.6.2017
 Printed: 11.16.2017